Vertical slots

The number of horizontal slots on each side of vertical slots, increase with length
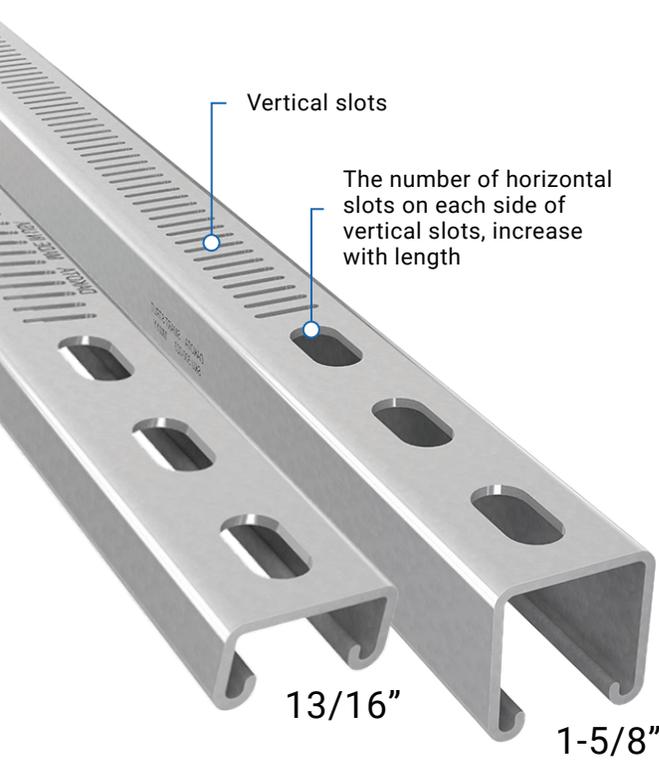
13/16"

1-5/8"

SMART-STRUT™

Features & Benefits

- Easily prefabricated
- Pre-cut lengths
- High-grade material
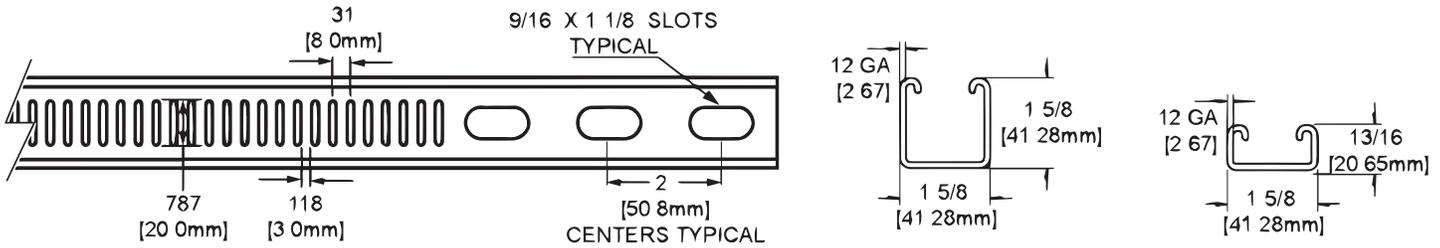- 10x Labor saving
- Clean and organized appearance

UL CERTIFIED
SAFETY US
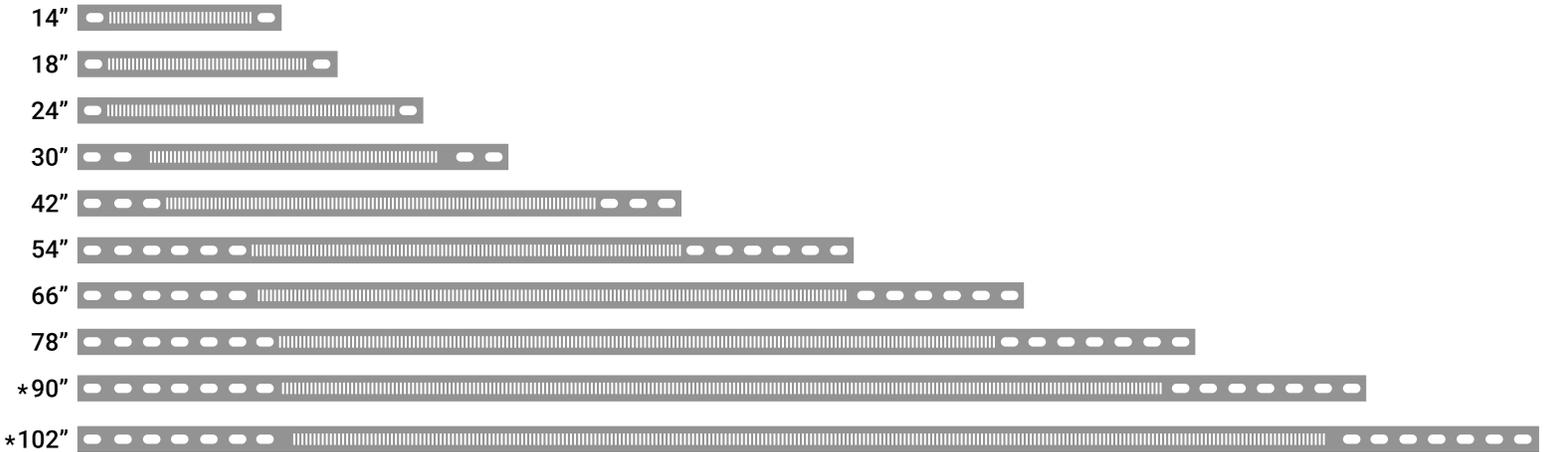E524691

MADE IN USA
PREMIUM QUALITY

bimobject®

Product Details

Material: 12 Gauge Structural Steel, Grade 50

Finish: Pre-galvanized Zinc

Applications: Electrical

31 [8 0mm]

9/16 X 1 1/8 SLOTS TYPICAL

787 [20 0mm]   118 [3 0mm]

2 [50 8mm] CENTERS TYPICAL

12 GA [2 67]   1 5/8 [41 28mm]

1 5/8 [41 28mm]

12 GA [2 67]   13/16 [20 65mm]

1 5/8 [41 28mm]

PRE-CUT LENGTHS OF STRUT

14"
18"
24"
30"
42"
54"
66"
78"
*90"
*102"

Not available in 13/16" Smart-Strut

SMART-STRUT™ SPECIFICATIONS

1-5/8" x 1-5/8" Strut Channel

PART#	LENGTH	GAUGE	HEIGHT	HORIZONTAL SLOTS	VERTICAL SLOTS	SUSPENDED SPAN
DS-SS15812-14-PG	1' 2" (14")	12 GA.	1-5/8"	2	32	12"
DS-SS15812-18-PG	1' 6" (18")			2	44	16"
DS-SS15812-24-PG	2' 0" (24")			2	64	22"
DS-SS15812-30-PG	2' 6" (30")			4	64	24"
DS-SS15812-42-PG	3' 6" (42")			6	96	36"
DS-SS15812-54-PG	4' 6" (54")			12	96	48"
DS-SS15812-66-PG	5' 6" (66")			12	128	60"
DS-SS15812-78-PG	6' 6" (78")			14	160	72"
DS-SS15812-90-PG	7' 6" (90")			14	192	84"
DS-SS15812-102-PG	8' 6" (102")			14	224	96"

1-5/8" x 13/16" Channel Strut

PART#	LENGTH	GAUGE	HEIGHT	HORIZONTAL SLOTS	VERTICAL SLOTS	SUSPENDED SPAN
DS-SS131612-14-PG	1' 2" (14")	12 GA.	13/16"	2	32	12"
DS-SS131612-18-PG	1' 6" (18")			2	44	16"
DS-SS131612-24-PG	2' 0" (24")			2	64	22"
DS-SS131612-30-PG	2' 6" (30")			4	64	24"
DS-SS131612-42-PG	3' 6" (42")			6	96	36"
DS-SS131612-54-PG	4' 6" (54")			12	96	48"
DS-SS131612-66-PG	5' 6" (66")			12	128	60"
DS-SS131612-78-PG	6' 6" (78")			14	160	72"